

# 3–5NM Solar Marine Lantern

SL-C310



CREATING SAFE FAIRWAYS



*This equipment complies with requirements of the U.S. Coast Guard in 33 CFR part 66*

Robust composite moulded base and top with handle. Aluminium chassis with rubber extruded corners



The SL-C310 is a robust, completely self-contained 3–5NM Solar LED Lantern specifically designed to withstand the tough marine environment, providing years of reliable, low-maintenance service. The 3 & 4 hole bolt pattern base fits directly onto existing 200mm bolt pattern industry standard mounts for ease of installation.

The base and top of the SL-C310 are made from composite moulded polycarbonate, with UV-stabilised rubber corners and gaskets providing a superior IP68 waterproof rating – the best in the industry.

Four (4) premium-grade solar modules are integrated into the assembly, and mounted to collect sunlight at all angles.


The tough, polycarbonate lens is specifically designed for use with LEDs and incorporates an environment-friendly spike – deterring unwelcome bird life. The lens design also ensures that vessel operators clearly see the light from above when passing the AtoN.

The SL-C310 comes with standard rotary switches for convenient in-field changes of flash characters and intensity selection. In addition, the unit may be provided with an IR programmer for added functionality. Programmable features include; flash code adjustment, battery diagnostics, lux adjustment and hibernation mode.

## GPS Synchronisation

Sealite has utilised the latest advancements in GPS technology to develop an internal synchronisation system that is incorporated into the SL-C310 lantern. Using overhead satellites, lights set to the same flash pattern will flash in unison.

When lanterns flash in synchronisation they can be clearly distinguished from other nav aids and confusing background lighting – ideal for rivers, marina entrances, channel marking and aquaculture.

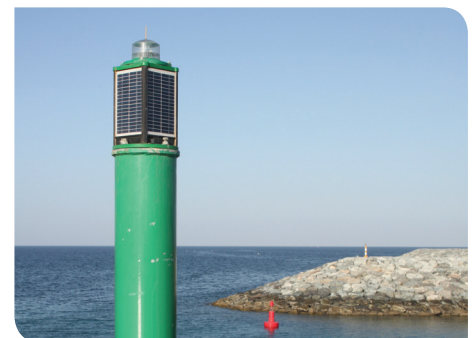

## Features

- GPS synchronisation
- Heavy-duty aluminium chassis
- User replaceable components
- 200mm bolt pattern for easy installation
- Rotary switches for flash characters & intensity selection

## High Performance

- Low ongoing maintenance costs
- Premium grade solar modules

## Applications

- Tough marine environments


## Optional

- IR programmable
- External On/Off switch
- External battery charging port

## Technical Specifications ·\*


SL-C310	
<b>Light Characteristics</b>	
Light Source	LED
Available Colours	Red, Green, White, Yellow, Blue
Typical Maximum Intensity (cd)*	Red - 121 Green - 88 White - 156 Yellow - 95
Visible Range (NM)	AT @ 0.74: 3-5 AT @ 0.85: 3.5-6.3
Horizontal Output (degrees)	360
Vertical Divergence (degrees)	>7
Available Flash Characteristics	Up to 310 IALA recommended (user adjustable)
Intensity Adjustments	Multiple intensity settings
LED Life Expectancy (hours)	>100,000
<b>Electrical Characteristics</b>	
Current Draw (mA)	Refer to Sealite Power Calculator
Circuit Protection	Integrated
Nominal Voltage (V)	12
Autonomy (nights)	>60 (14 hour darkness, 12.5% duty cycle)
Temperature Range	-40 to 80°C
<b>Solar Characteristics</b>	
Solar Module Type	Monocrystalline
Output (watts)	20 (4 x 5watt)
Charging Regulation	Microprocessor controlled
<b>Power Supply</b>	
Battery Type	Gel SLA
Battery Capacity (Ah)	12
Nominal Voltage (V)	12
<b>Physical Characteristics</b>	
Body Material	Aluminium chassis with UV-stabilised rubber corners and gaskets. Polycarbonate composite moulded top and base
Lens Material	LEXAN® Polycarbonate – UV-stabilised
Lens Diameter (mm/inches)	98 / 3 <sup>7/8</sup>
Lens Design	Single LED Optic
Mounting	3 & 4 hole 200mm bolt pattern
Height (mm/inches)	433 / 17
Width (mm/inches)	233 / 9 <sup>1/5</sup>
Mass (kg/lbs)	9.4 / 20 <sup>3/4</sup>
Product Life Expectancy	Up to 12 years ^
<b>Certifications</b>	
CE	EN61000-6-1:2007, IEC61000-6-1:2005, EN61000-6-3:2007, IEC61000-6-3:2006
IALA	Signal colours compliant to IALA E-200-1
Quality Assurance	ISO 9001:2015
Waterproof	IP68
<b>Intellectual Property</b>	
Trademarks	SEALITE® is a registered trademark of Sealite Pty Ltd
Warranty *	3 years
Options Available	<ul style="list-style-type: none"> <li>• 50mm pole mount adapter plate</li> <li>• IR Programmer</li> <li>• External ON/OFF Switch</li> <li>• External Battery Charging Port</li> <li>• GPS Synchronisation: enable/disable</li> <li>• 5° Lens</li> </ul>

## Photometric Output

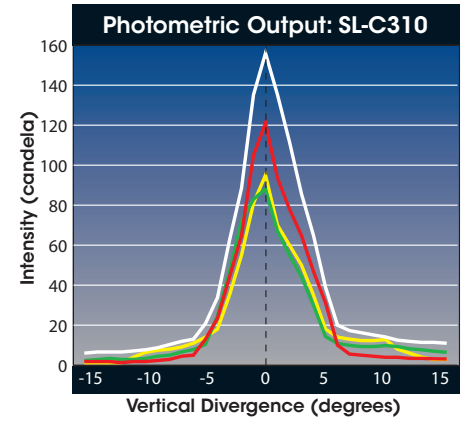

Typical Maximum Intensity (cd)	
SL-C310	
RED	121
GREEN	88
WHITE	156
YELLOW	95

## Technical Illustration

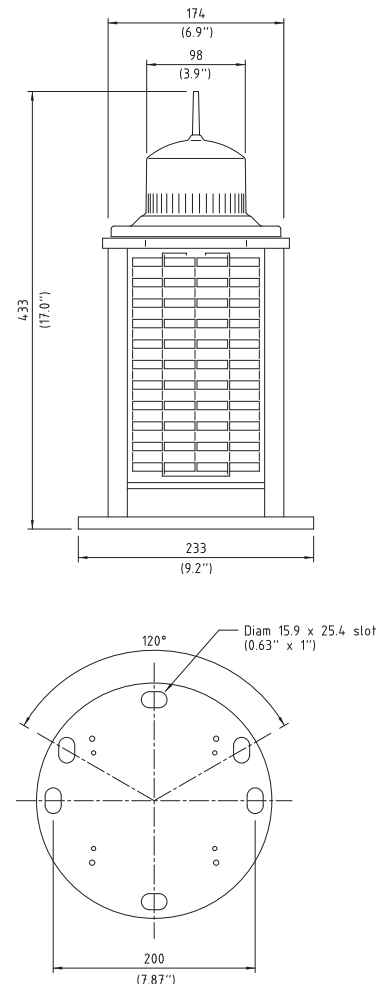

## HOW TO ORDER SL-C310

SL-C310-S2-[colour]-[?]

Product No.: \_\_\_\_\_

Series: \_\_\_\_\_

Colour: \_\_\_\_\_

Options: \_\_\_\_\_

CP - Charging Port  
SW - ON/OFF Switch

We believe technology improves navigation™